

Supplement to the user information

AquaControl +

Fill level measuring device and drinking water supply

Item-No.: 351021

8. Special functions:

a) Analogue outlet:

Your device has been fitted with an additional analogue pot. This port shows the percent values from the system control (0% -100%) by a voltage range from 0V to 10V. The following connection values apply:

Minimal apparent ohmic resistance	: 20K Ohm
Short circuit protection	: Yes
Short circuit current	: Approx 15mA
Cable length	: maximal 200m (shielded)

Note:

The system control is only capable of displaying whole percent values (no fractions). These are shown on the analogue signal display.

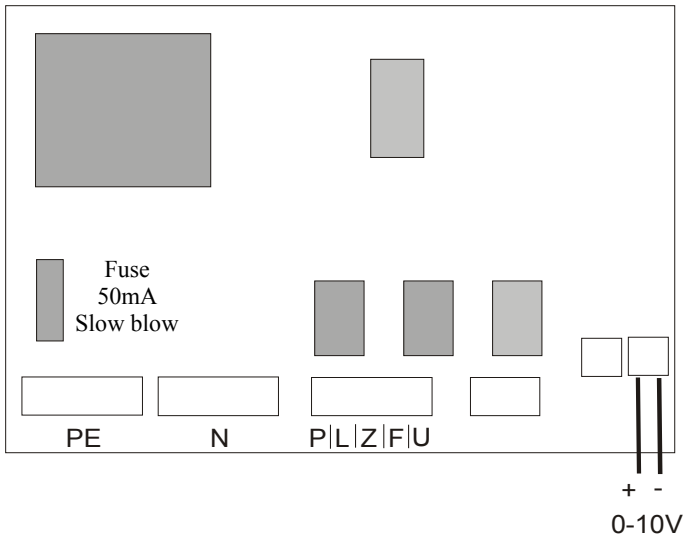


Diagram 19: Location of the analogue port

The M16 opening on the underside of the system control device must be opened and the cable drawn through. Place the supplied grommet into the opening and pass the cable through into the system control.